




Follow these steps to set-up the all new RG21 Router as mesh.


Wired Connection:

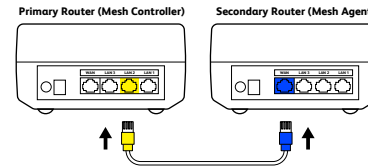

STEP 1

Switch on the secondary router that will become the Mesh Agent.


Use the Ethernet cable to connect the WAN port of the secondary router to the LAN port of the primary router.



STEP 2

The WPS LED on both devices will light up. The INT indicator on the Mesh Agent will light up and blink. This means the Internet is now accessible.


Wireless Connection:

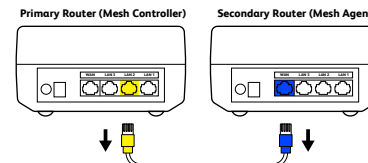

Using the Ethernet cable

Complete all the steps in the **Wired Connection Guide** and then disconnect the Ethernet cable.

The Mesh Agent will switch to wireless connection automatically.

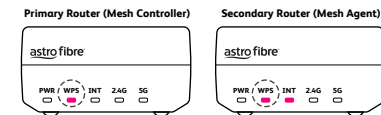

Using the WPS button

Press the WPS button on the primary router for 3 seconds & release the button. The WPS LED will blink. Repeat the above step for the secondary router.

The WPS LED on both (Mesh Controller & Mesh Agent) devices will stop blinking and light up. This means the mesh setup is successful.

When the INT indicator stops blinking and lights up, you can now access the Internet!

astrofibre™

RG21 Router Get Started

Time to upgrade your router!
So let's get started.